GREEN SERIES TOUCH-FREE ELECTRONIC LAVATORY FAUCET

SPECIFICATIONS

For cold or premixed water. Solid brass one-piece construction.

Available with an internally mounted 9V battery, externally mounted 9V battery or a 9V transformer. Filters included. Sensor range is adjustable by remote control. Other sensor settings (delay in, delay out and security time) can also be adjusted by remote control. Faucet will automatically shut off after being used for more than 90 seconds. Sensor features a low battery level indicator.


OPERATION

Electronic lavatory faucet activated by infrared sensor. Touch free electronic faucet .The faucet is activated automatically when the user brings his hands within the sensor range, and stops when the user removes his

APPLICATION


Deck mounted faucet combining an elegant design with anti-vandal features. Helps washrooms stay cleaner and save water. Prevents cross contamination.

PRODUCT AT A GLANCE			
Installation	Lavatory mounted		
Power Supply	 External battery box with 9V Alkaline Battery 9V Transformer 		
Operating pressure	0.5-8.0 BAR / 7.0-116 PSI. For a pressure over 8 bar use a pressure reducing valve.		
Water supply	Cold or premixed water		
Water flow	6 LPM / 1.58 GPM - SSR PCA stream		
Water Saving Options	6 LPM / 1.58 GPM ; 4 LPM / 1 GPM ; 3 LPM / 0.8 GPM 1.89 LPM / 0.5 GPM ; 1.3 LPM 0.35 GPM		
Water temperature	70°C Maximum		
Security Time	90 seconds. Adjustable with Stern's remote control.		

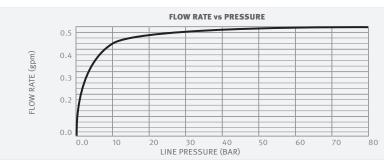

ORDERING INFORMATION		ORDERING INFORMATION	
MODEL	CODE	PRODUCT NAME	CODE
GREEN AB 1953	225901	Matching Green Soap Dispenser - battery operated	225845
GREEN B AB 1953	225951	Matching Green Soap Dispenser - transformer operated	225840
GREEN E AB 1953	225941		
GREEN BRE AB 1953	225921	Remote Control	07100005



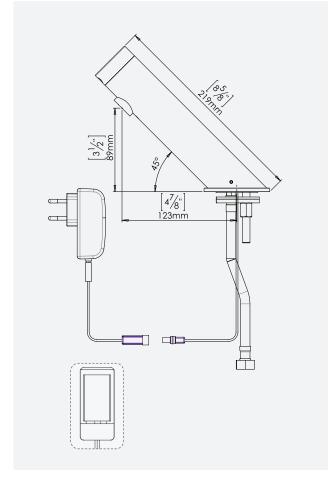



ADVANTAGES











APPROVALS









777 Passaic Avenue Clifton NJ, 07012 USA: sternusa@sternfaucets.com International: info@sternfaucets.com www.sternfaucets.com