

VENUS 3003R PE

ELECTRONIC FLUSH VALVE FOR TOILETS

SPECIFICATIONS

Self-closing electronic flush valve for toilets, designated for high security locations. Remote activation by piezo button. For installation in holding cells while the flush valve body is concealed in a remote service area. Powered by a 9V transformer. Each use activates a pre-set run cycle. Special settings such as 24 hours mandatory hygiene flush, lock out time and pre-set run cycle can be customized according to specific project requirements.

OPERATION

Self-closing electronic flush valve for W.C. The system flushes when users touch the designated area on the piezo button.

APPLICATION

Anti-ligature design with a "non-hold open" feature specifically for high security locations. Robust design with no moving parts ensures low maintenance and piezo switch operation for additional vandal protection.

PRODUCT AT A GLANCE



Installation	Exposed wall-mounted
Power Supply	<ul style="list-style-type: none"> • 9V battery • 9V transformer
Operating pressure	0.5-8.0 BAR / 7.0-116.0 PSI
Water supply	Cold and premixed water
Water temperature	Maximum 70°C

ORDERING INFORMATION

MODEL	CODE	POWER	ADDITIONAL SPECIFICATIONS
VENUS 3003R PE	420280	9V transformer	Remote operation by piezo switch

OPTIONS

OPTION	CODE
Remote control	07100005

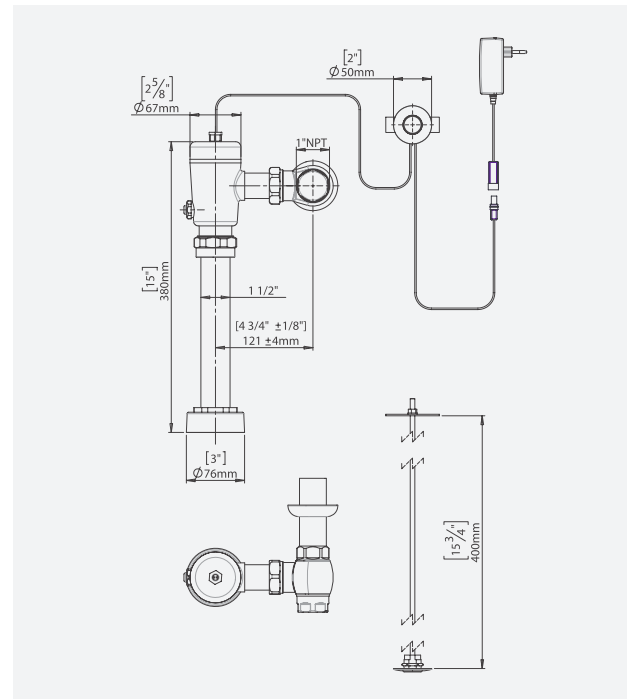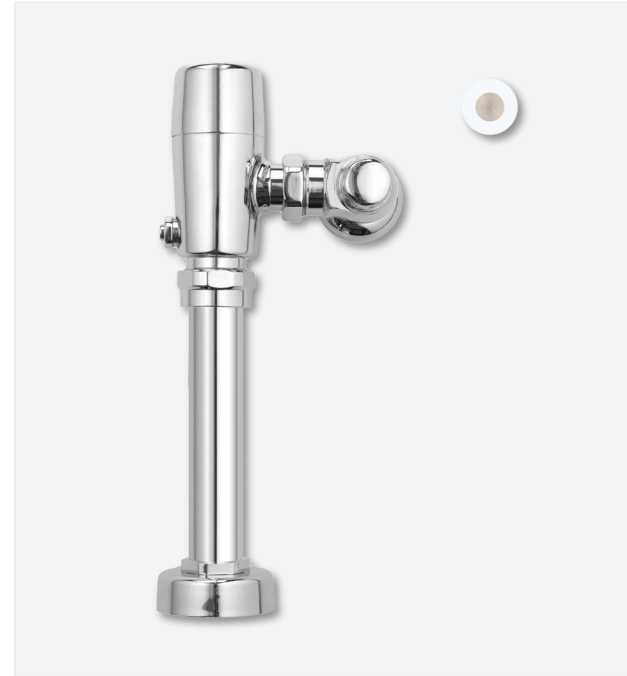

ADVANTAGES



LEED RATING



OPTIONAL HYGIENE FLUSH



GERM FREE



ADJUSTABLE SETTINGS



EASY TO INSTALL



ADA DESIGNED

APPROVALS



777 Passaic Avenue
Clifton NJ, 07012
USA: sternusa@sternfaucets.com
International: info@sternfaucets.com
Toll Free: 1-800-4364410
www.sternfaucets.com